





Assembly Instructions INTRO PLUS


NECESSARY TOOLS AND SAFETY GEAR(NOT SUPPLIED)

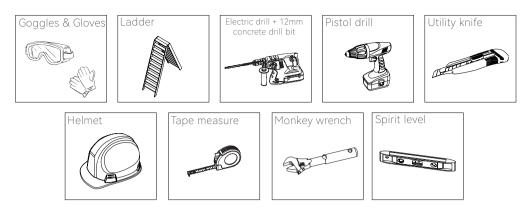

2D FOOTING MEASUREMENT (dimensions in mm)

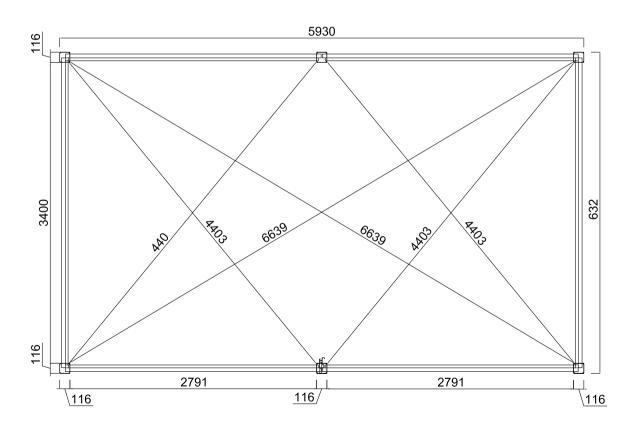

3D FOOTING MEASUREMENT (dimensions in mm)

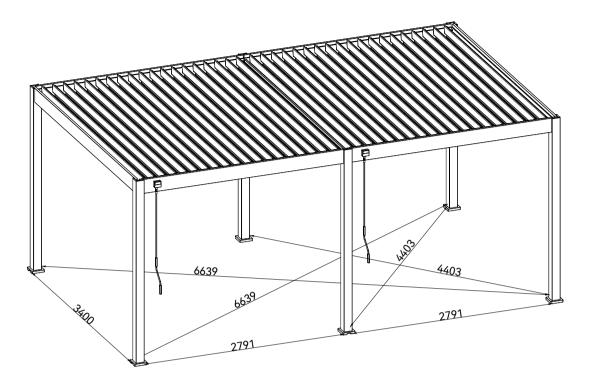

PRECAUTION OF USE

This product should not be used in extreme weather: storms, violent winds, hail, and snow.We guarantee the resistance of the pergola for winds up to 100 km/h and a maximum snow weight of 50kg/m².

As in the case of strong winds or snow, we highly recommend leaving the louvers open. To maintain good working conditions of your louvres, please clear any snow on them.

Our pergola can withstand heavy rain, but we cannot guarantee it will be 100% waterproof due to some extreme weather conditions.

Exceptional climatic events may compromise the perfect sealing of the product.

To avoid any damages and injuries, we do not recommend climbing on the roof or the structure of the pergola.

TIPS AND SAFETY INSTRUCTIONS

Depending on the location and surface area, construction may be subject to building permits. Make sure you have checked with your local authorities to obtain the needed information before the assembly.

Product assembly :

- At least 2/3 people required
- Remove protective film (around 1 hour needed)
- Do not keep children near the assembly area
- Beware of the risk of pinching
- Do not tighten the screws before assembling the whole product
- All assembly steps must be carefully followed
- Check the level of the structure on all sides
- Do not anchor the pergola before assembling the whole product

No changes can be made to the product. Products tampered with by the user are not covered by the warranty, thus being declared as void.

The location should be chosen carefully. It is recommended to avoid mounting your pergola on a rainy day, facing the prevailing winds, and under an overhanging tree.

The pergola must be mounted on a flat-level foundation. It is recommended to install it on a concrete slab or 25x25 cm concrete pads at each post. Please, anchor the pergola properly to the ground using expansion screw.

If you would like to mount your pergola near your house or a building, please check the presence of gutters for water drainage.

Should these instructions not be followed or only partially, the warranty will be voided by the seller.

MAINTENANCE

Regular maintenance is necessary to ensure its longevity and aesthetic appearance.

We recommend to :

- Clean your pergola once or twice a year with fresh water using a sponge or cloth.
- Do not use detergent or an abrasive material.
- Check the tightness of the screws regularly (at least once a year).
- Oil fastening regularly (at least once a year).
- Make sure that nothing hinders the water flow in the gutters (leaves, branches...).
- Remove any water that might stagnate around the legs of the pergola (lift the posts skirts).

WARRANTY

This warranty does not cover :

- Normal wear and tear inherent from the products.
- Loss or breakage of any part during unpacking or installation.
- Lack of care, neglect, vandalism, impact with foreign body, force, contact with a brasives material, product aesthetics, disassembly, rebuilding or relocation.
- Force majeure: hail, high winds, storms, snow, floods, lightning etc...
- Product tampered with by the user.

The warranty only takes in account the replacement of spare parts or the provided product, no refund will be issued.

All warranty claims must be made at the sales outlet (store or website) where the product has been purchased.

PARTS LISTS (PER CARTON)


Before proceeding with the assembly of your louvered pergola, it is necessary to check that all parts listed are supplied and not damaged.

Any missing part must be reported within 10 days of delivery.


You can either go through your local outlet store or make the request directly on our website.

Do not discard the packaging without ensuring that the product is functioning properly.

There is a Product Tracking Number in the inner side of the carton(see below diagram). For better and efficient after-sales in the future, when tear down the carton box, please take a photo of the Tracking Number and save the photo.

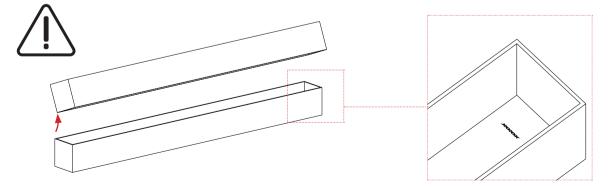

CARTON 1/6

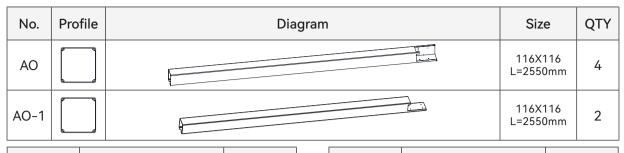

No.	Diagram	QTY
ю		6
OL	en ser	6

No.	Diagram	QTY
KO	le l	2
LO	e.	36
LO-1	lo lo	38
МО	Co	74
MO-1	0	74
NO	II. Co	2
00		2
PO		2
QO	6mm	24
EO-1	6	2
RO	Ø	24

No.	Diagram	QTY
ТО	10×80	24
XO-1	6×35 4mm	24

No.	Diagram	QTY
SO		76
UO	© lock nut	112
UO-1	plastic nut	38
VO	0	188
WO	4×16 PH2	152
WO-1	5×19 8mm	6
хо	6×40 (O) 6×40 (4mm)	74
XO-2	6×20 () 6×20 4mm	38
XO-3	6×16 0	4
YO	6×45 4mm	6


CARTON 1/6

No.	Diagram	QTY
ZO-1	4mm	1
ZO-2	4mm	1
ZO-3	6mm	1

No.	Diagram	QTY
ZO-4	6mm	1
ZO-5	2 10mm	1
ZO-6	PH2	1
ZO-7	8mm	1

CARTON 2/6


No.	Profile	Diagram	Size	QTY				
во		. F	75X195 L=2894mm	2				
BO-1		······································	75X195 L=2894mm	2				
со			75X195 L=3503mm	2				
EO			75X110 L=3464mm	1				
FO			27X8 L=2744mm	2				
НО			L=1300mm	2				



CARTON 3/6

No.	Profile	Diagram	Size	QTY
GO			166X38 L=3464mm	10


CARTON 4/6



CARTON 5/6

No.	Profile	Diagram	Size	QTY
GO			166X38 L=3464mm	10


CARTON 6/6





ASSEMBLY GUIDELINES

- Step 1 : Frame
- Step 2 : Assembling louvers
- Step 3 : Install louvers & Connection

ASSEMBLING DIAGRAM

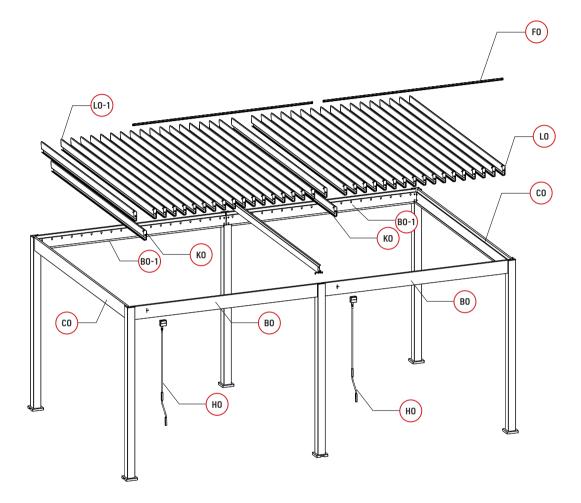

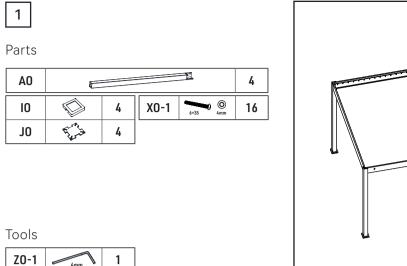





Z0-1 4mm EF 4mm


1


ZO-2

Post installation diagram

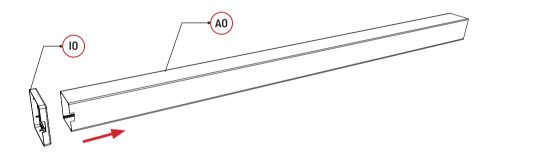

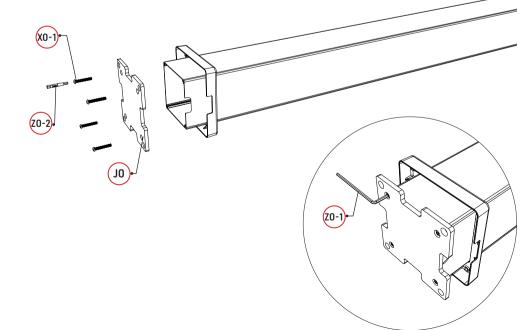








Tools


10010		
Z0-1	4mm	1
Z0-2	4mm	1


Post installation diagram

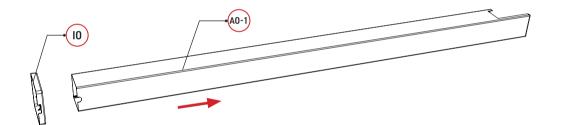


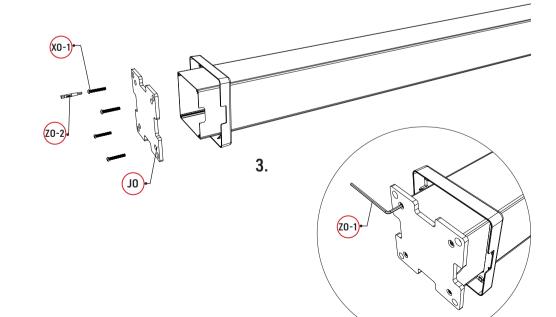


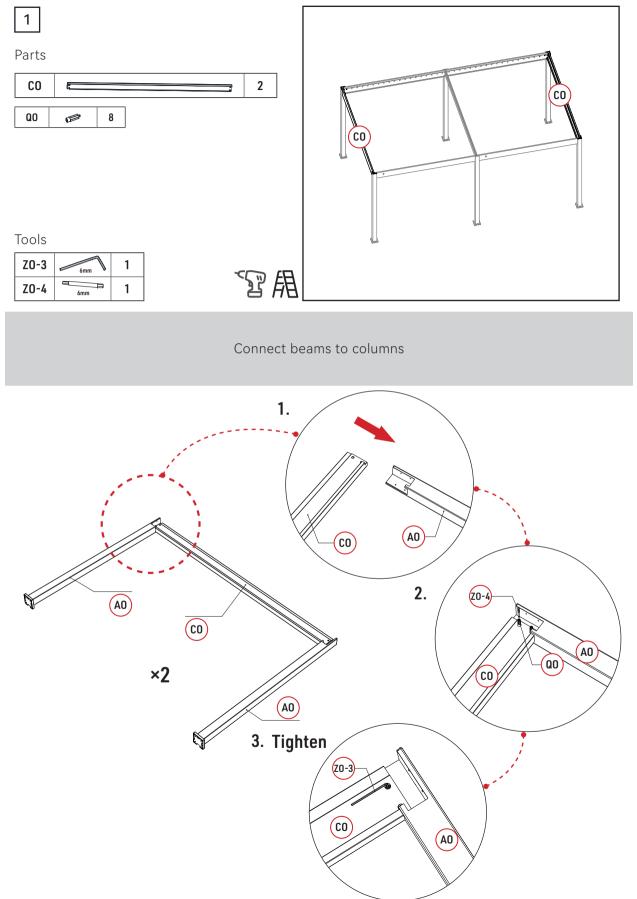


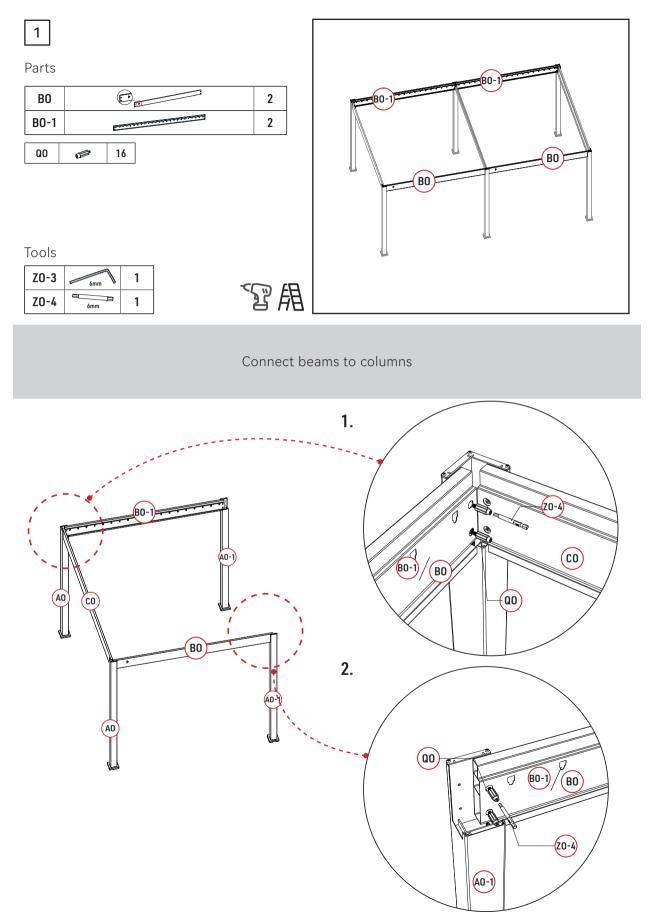


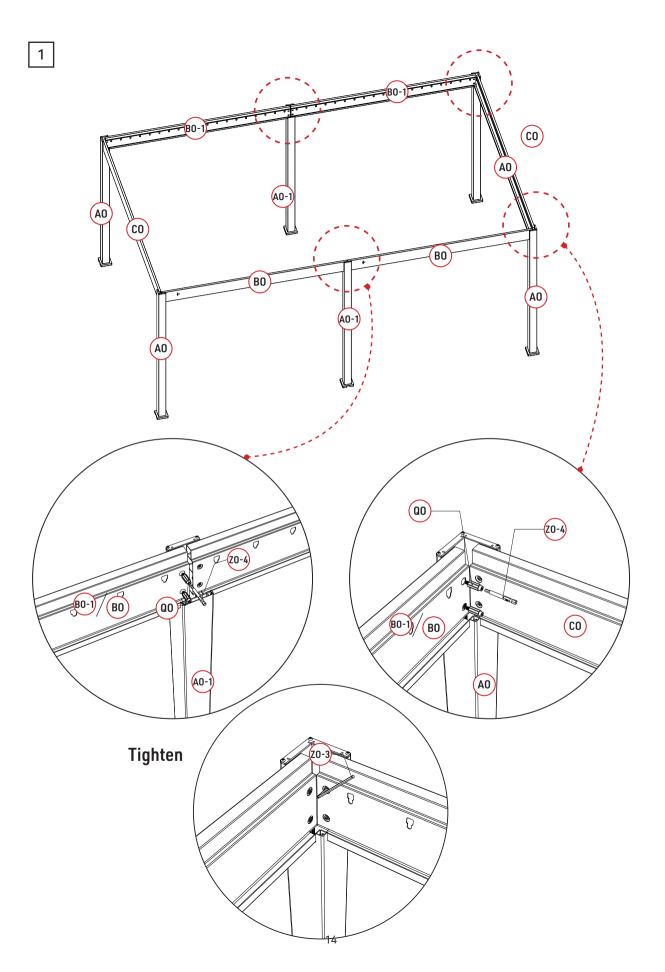

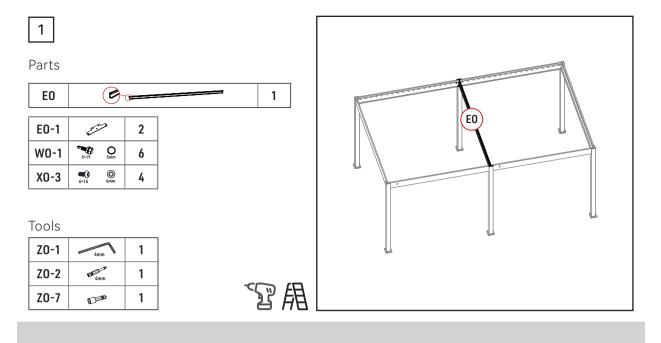



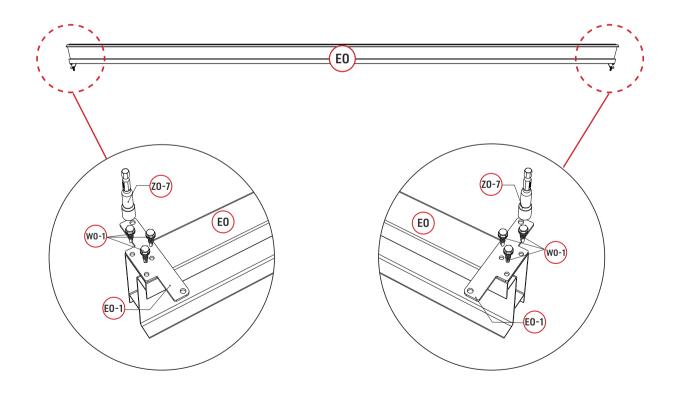

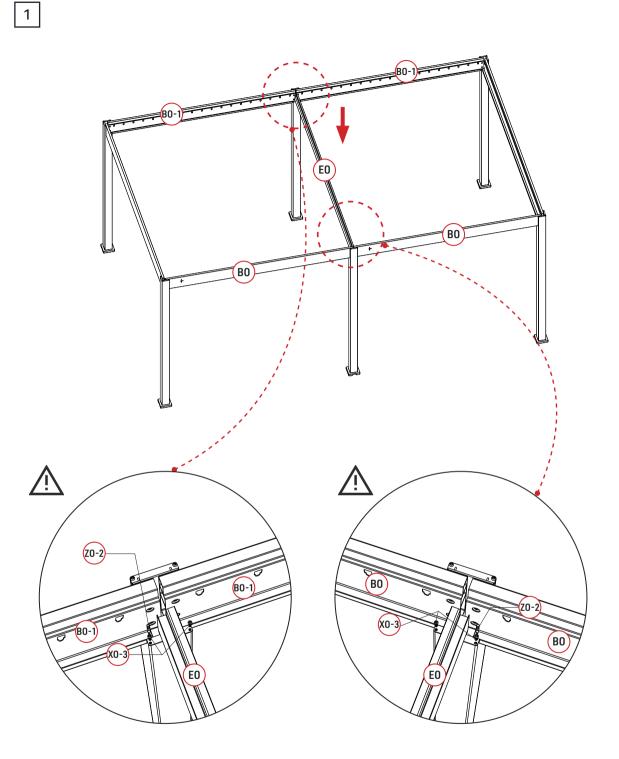

Parts


LO	(.)	36	M0-1	9	74	VO	0	74
L0-1	Ĵ	38	XO	6×40 0	74			
МО	ST)	74	UO	O lock nut	74			


Tools

Z0-1	4mm	1	The illu
Z0-2	GA 4mm	1	wrencl with a


The illustration uses a manual wrench, which can be replaced with an electric P-tip.

Install the spindles for the louver cover on both sides of the louvres. Note: To avoid any broken of the plastic parts(MO), when use the pistol drill, please reduce the twisting force of it .

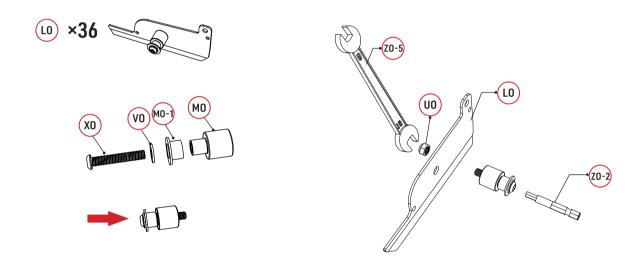


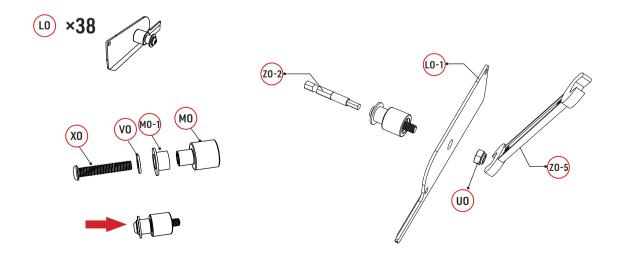





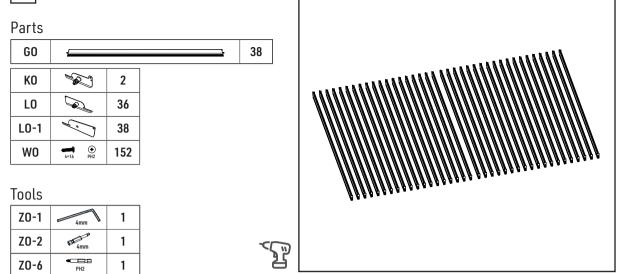



Louver connection








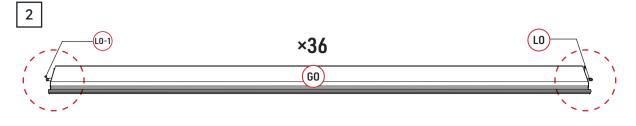


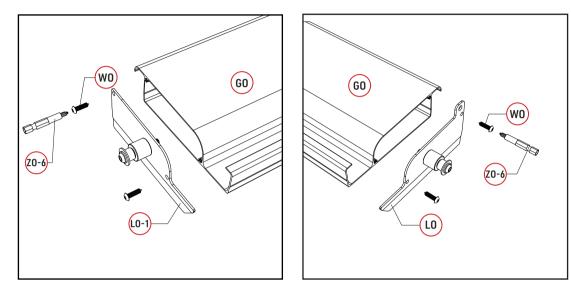

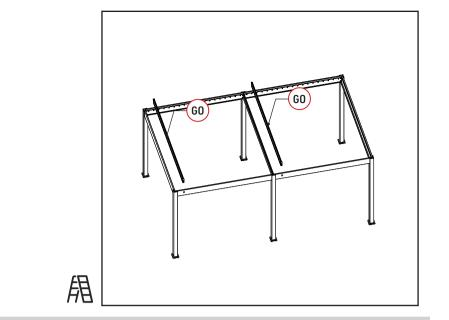



Fasten rubber plugs on both ends of the louvers

3

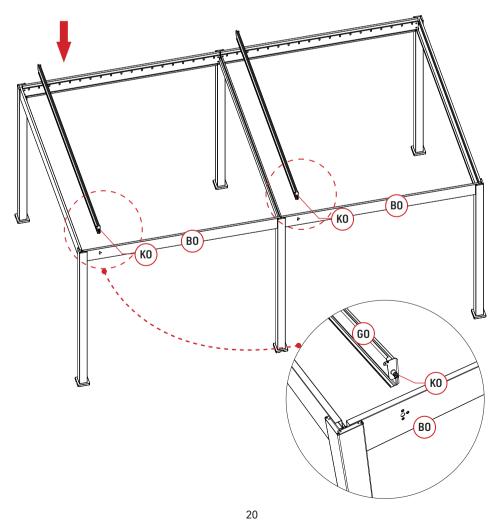








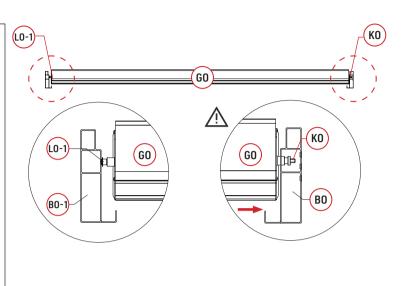





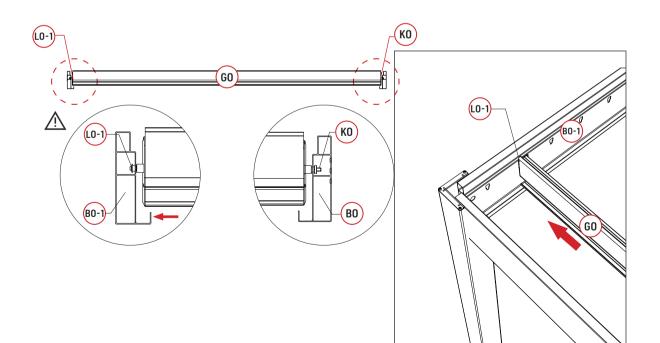


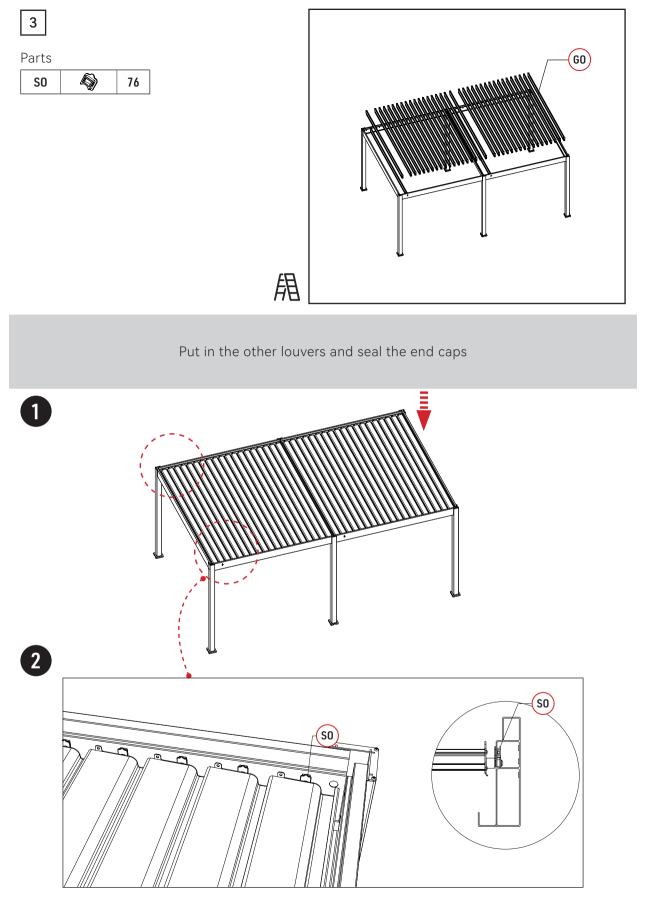

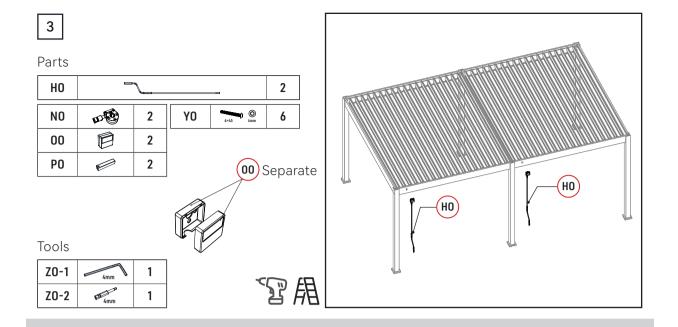





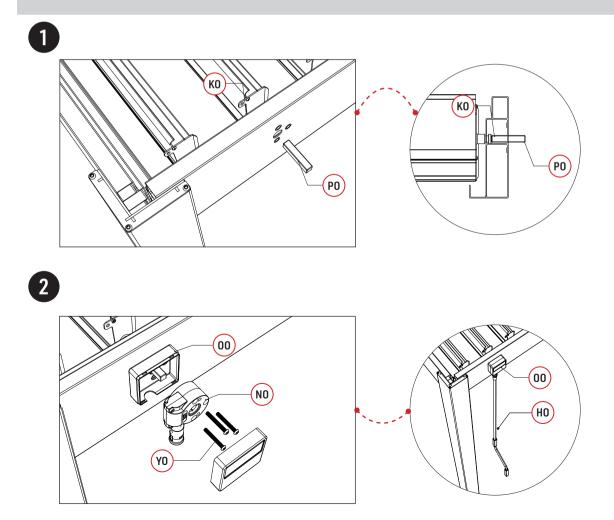

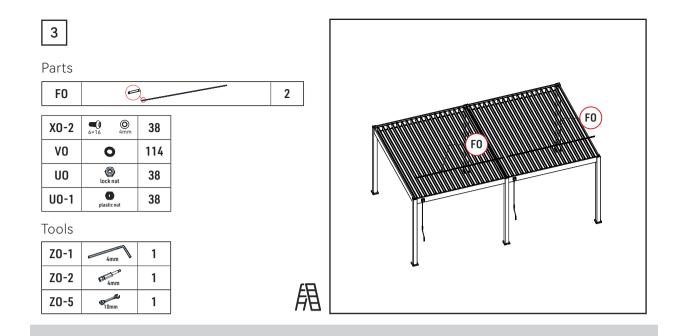

Louver connection

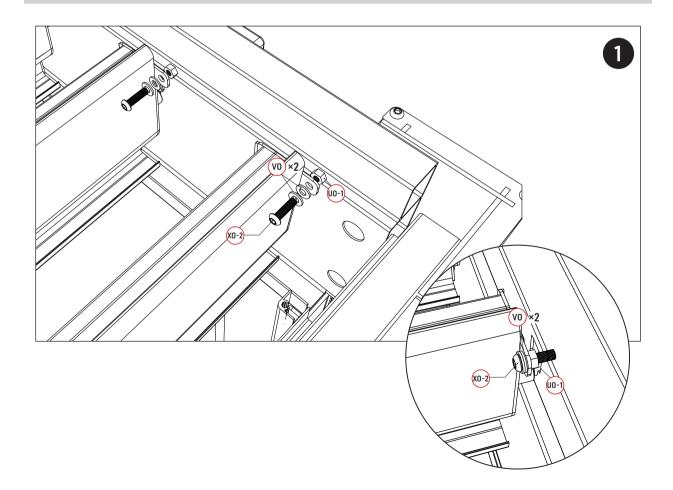


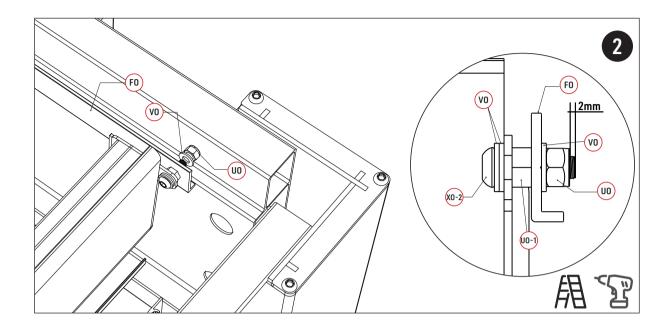




Parts

RO	0	24
TO	10×80	24

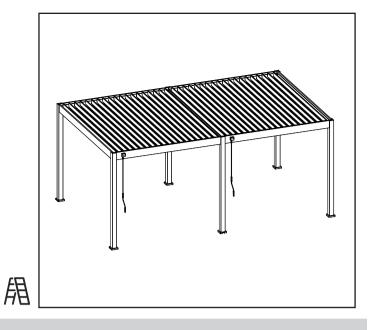

Close the cover to complete the fixing of the pergola

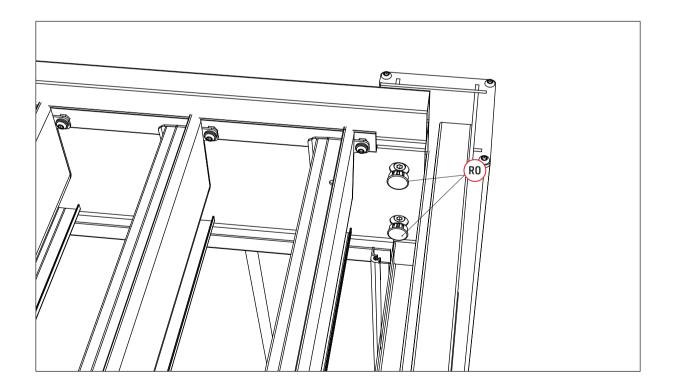

After confirming the dimensions, then fix the expansion bolts on the plate.

